

16 Channel 16 scans Low-turning PWM Constant Current Driver

1 Overview

DP3153 is a 16-channel low-transition PWM constant-current drive chip designed for LED displays. It integrates high-precision current generation circuit technology on-chip, so that the current error between chips can be controlled within 2.0%, and the new low-gray and high-brush mode is added to improve low-gray refresh rate. And integrated with a number of lifting LED display, the exclusive technology of display effect can bring more improvements.


2 Features

- Power supply voltage range: 2.6~5.5V
- Operating temperature range: -40°C ~ 85°C
- Scanned area : 1 ~ 32 scans , arbitrarily adjustable
- 16 constant current output channels
- Support non-external resistor mode
- Constant current output range
 - 0.5mA ~ 18mA ($V_{out}=0.3V$)
 - 0.5mA ~ 25mA ($V_{out}=0.45V$)
- Current accuracy between channels
 - Typical value : $\pm 1.2\%$ Max : $\pm 2.5\%$ ($V_{out}=0.45V$)
- Current accuracy between chips
 - Typical value: $\pm 1.5\%$ Max: $\pm 2.0\%$
- High gray independent refresh, no interframe black field
- Low gray high brush, low gray supports 1~8 times display frame rate

- The highest refresh rate supports 64 times frame rate (3840Hz)
- Optimize the display state
 - improve low gray uniformity
 - improve the first line darkening
 - improve up and down ghosting
 - improve high-low gray coupling
 - improve cross-panel coupling
- Integrated PLL produces internal GCLK with lower EMI
- Encapsulation mode: QSOP24/QFN24
- Excellent ESD features

3 Application Fields

- High refresh rate LED video display
- Monochrome two-color or full- color LED display
- High density and small pitch LED panel display

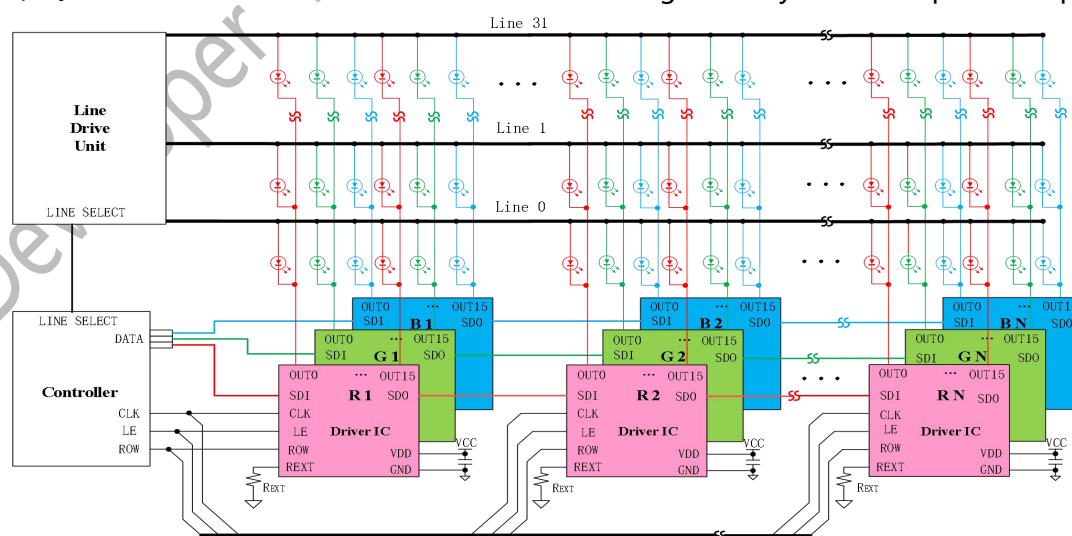

DP3153 Typical Application Schematic

Content

1 Overview	1	8.1.1 Remove Open Circuit Bad Spot Crosses .18
2 Features	1	8.1.2 High and Low Gray Interference and Coupling Display Bad effect Optimization 18
3 Application Fields	1	8.1.3 Remove Ghostiness and Bandless Lighting Effects 19
3 Products Description	4	9 Instruction and Register
4 Schematic Circuit Diagram	5	9.1 Register Instruction
4.1 Input/Output Equivalent Circuit	5	9.2 Data Instructions
4.2 Internal Circuit Block Diagram	6	9.3 Single/Double Mode Switch
5 Parameter List	7	9.4 Write Register
5.1 Maximum Limit Parameter	7	9.5 Register Singal Sending Way
5.2 ESD Rating	7	9.6 ROW Signal Sending Way
5.2.1 Contact ESD	7	9.7 PWM Display Mode
5.3 Electrical Characteristics (Unless otherwise specified, VDD=3.5V ~ 5V, Ta=25℃)	8	9.7.1 General Frame Synchronization Mode25
5.4 Dynamic Characteristics (Unless otherwise specified, VDD=3.5V ~ 5V, Ta=25℃)	10	9.7.2 High Gray Data Refresh Frame Synchronization Model Independently 25
6 Test Circuit Diagram	11	9.7.3 High-gray data Independently Refreshes Asynchronous Mode 25
6.1 Test Circuit 1	11	9.7.4 Low Gray High Bruch Mode
6.2 Test Circuit 2	11	9.8 Relevant Configuration of PWM Display26
6.3 Test Circuit 3	12	9.8.1 Number of Row Scans Configured
6.4 Test Circuit 4	12	9.8.2
6.5 Test Circuit 5	13	9.8.3 PWM Display Packet Configuration
6.6 Test Circuit 6	13	9.8.4 Internal Grayscale Clock Configuration ...26
6.7 Test Circuit 7	14	9.8.5 PWM Grayscales Series & Gamma Generation
7 Typical Characteristic Diagram	14	9.8.6 Calculated the Display Time for Each Row27
7.1 Constant Current Source Accuracy Test Chart14		9.9 Open Circuit Detection and Removal of Bad Spots
7.1.1 Inter-chip Current Error	14	9.10 Register
7.1.2 Inter- channel Current Error	15	10 Encapsulation Cooling Power (P _D)
7.2 Constant Current Source Inflexion Point..... 15		11 Load Terminal Voltage(VLED)
7.3 Adjust Output Current by An External Resistor17		12 Encapsulation Information
7.4 Resistive-free Model with Current Adjusted by register	17	13 Official Announcement
8 Typical Display Effect Sample Image	18	
8.1 Display Effect	18	




Revision Record

Version	Date	Reviser	Revised Contents
V1.0	2025.02	WM	Original Version


Developer Microelectronics Confidential

3 Products Description

● Pin Definition

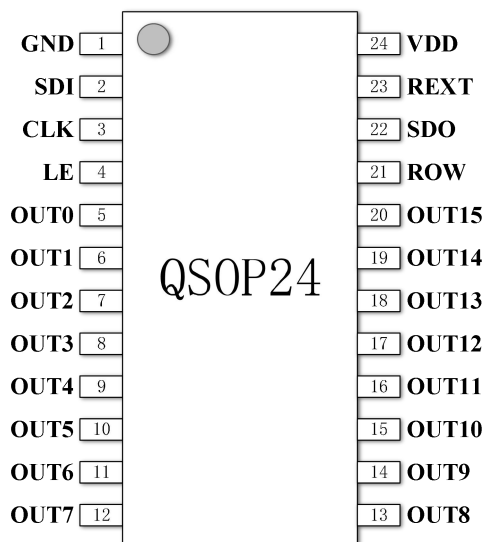

QSOP24 Pin Definition Diagram

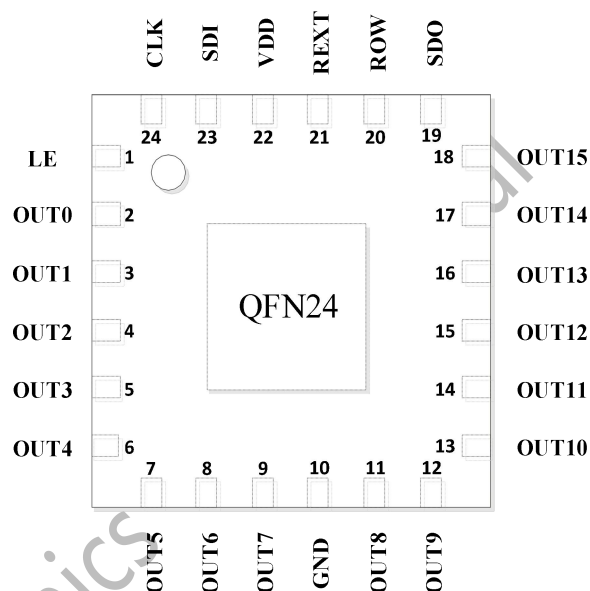

QFN24 Pin Definition Diagram

● Pin Description

QSOP24 Pin No.	QFN24 Pin NO.	Pin Name	Pin Description
1	22	GND	Chip Grounding Terminal
2	23	SDI	Serial Data Input Terminal
3	24	CLK	Serial Clock Input
4	1	LE	Data and Instruction Latch End, different LE length represents different instructions
5 ~ 20	2 ~ 9 11 ~ 18	OUT0 ~ OUT15	Constant Current Output Terminal
21	20	ROW	Row Switching Signal
22	19	SDO	Serial Data Output
23	21	REXT	Connect the External Resistance Terminal
24	10	VDD	Chip Power Terminal

● Product Purchase Information

Product Name	Encapsulation mode	Packing Method	Quantity/Disc	Humidity Level
DP3153	QSOP24	Tape	4000	MSL=3
	QFN24	Tape	5000	

● Product Marking



QSOP24



QFN24


DP3153 is the product name

XXXXXX represents the product batch number


4 Schematic Circuit Diagram

4.1 Input/Output Equivalent Circuit


SDI, CLK, LE, OE Input terminal

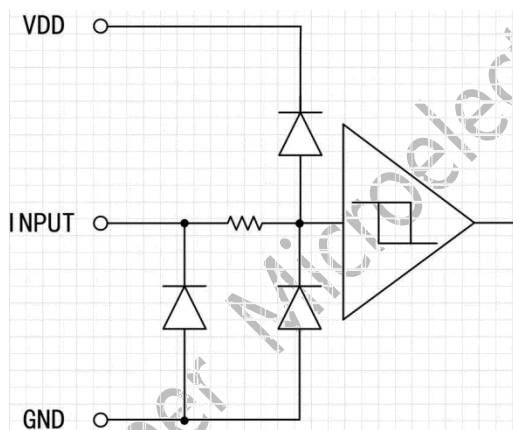

SDO Output terminal

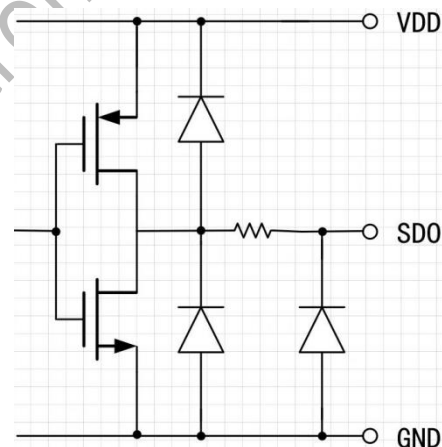

4.2 Internal Circuit Block Diagram

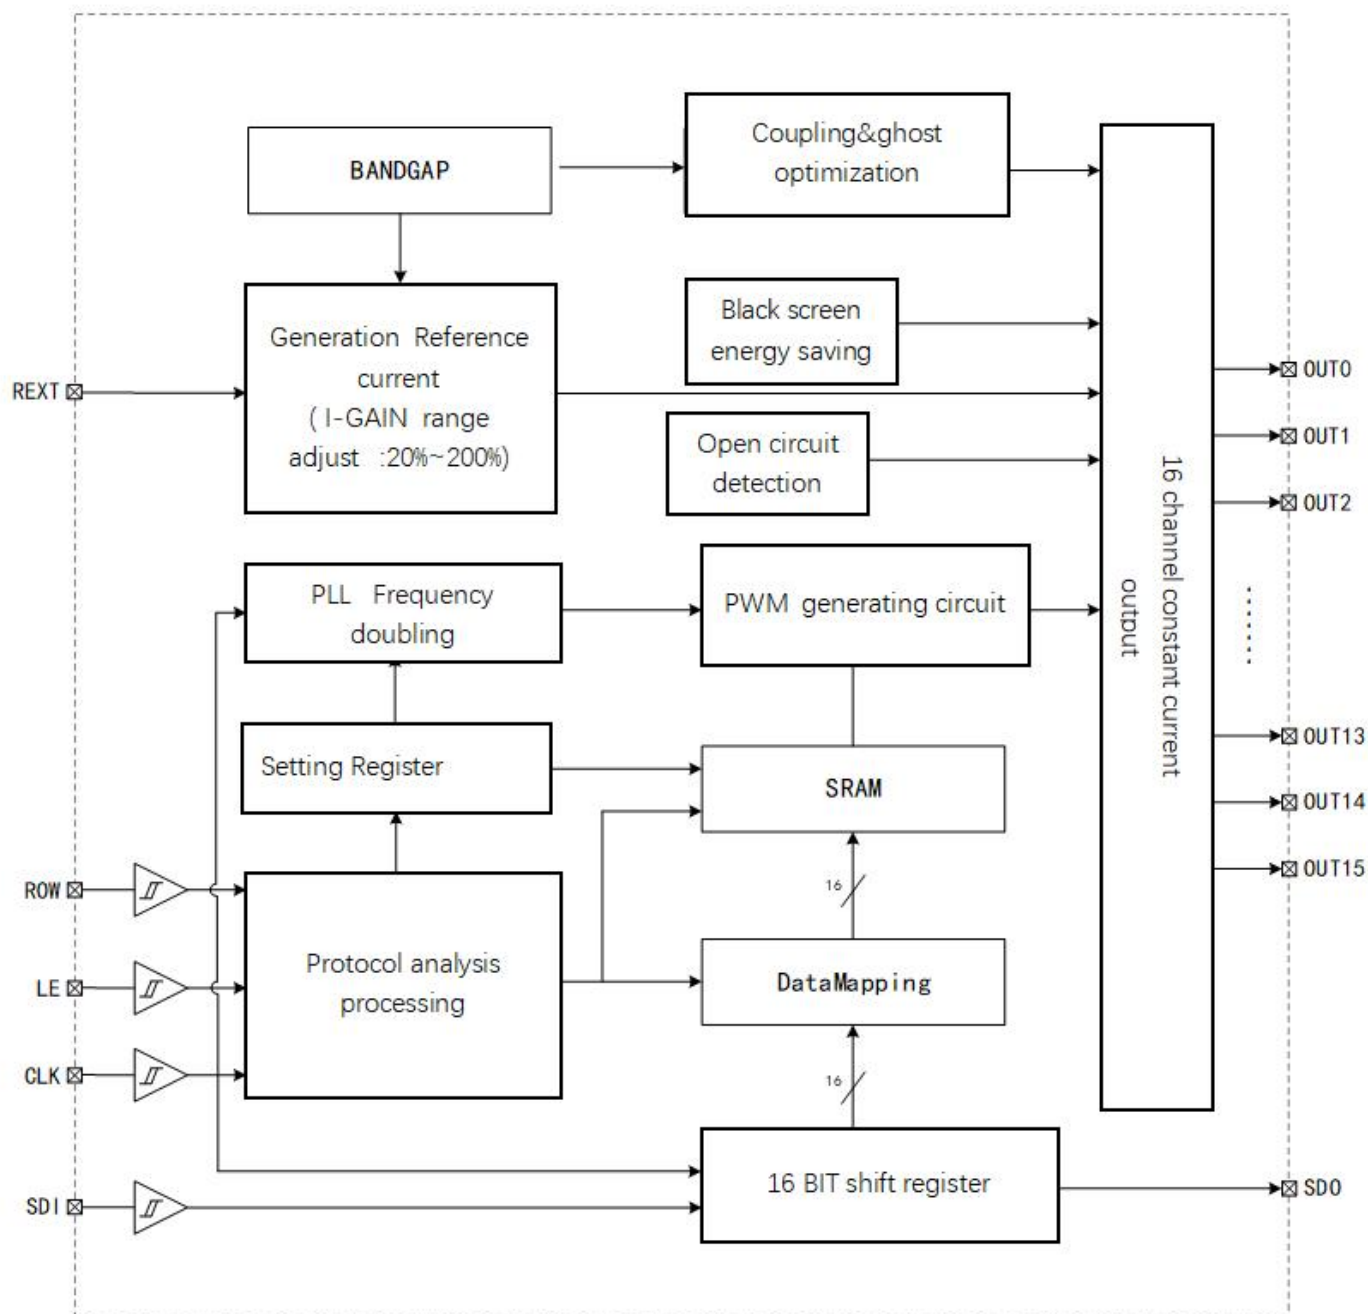

A Schematic diagram of the internal circuit

5 Parameter List

5.1 Maximum Limit Parameter

Project	Symbol	Rated Value	Unit
Supply Voltage	V_{DD}	0 ~ 5.5	V
Output Current	I_O	30	mA
Input Voltage	V_{IN}	-0.4 ~ $V_{DD}+0.4$	V
Output withstand voltage	V_{OUT}	11	V
clock frequency	F_{CLK}	25	MHz
Operating Temperature	T_{opr}	-	-
Storage Temperature	T_{stg}	-55 ~ 150	°C

- All voltage values are based on the chip grounding terminal (GND) as a reference point, and the test temperature for the maximum limit parameter is 25°C.
- If the actual working conditions exceed the specified value may cause permanent damage to the components; If the actual operating conditions are slightly below the maximum and work for a long time, the reliability of the component may be reduced. The above values are only partially specified, and this product does not support functional operation under other conditions outside the specifications.
- The maximum peak welding temperature of surface paste products shall not exceed 260°C. The temperature curve shall be set by the factory according to J-STD-020 standard, the actual situation of the factory and the solder paste manufacturer's suggestion.

5.2 ESD Rating

5.2.1 Contact ESD

Symbol	Condition		Min Value	Typical Value	Max Value	Unit
$V_{(ESD)}$	Human-body model (HBM) ¹	OUTn Pin-GND	-	-	-	kV
		OTHER Pin-GND	-	-	-	kV
	Machine Mode (MM) ²	OUTn Pin-GND	-	-	-	kV
		OTHER Pin-GND	-	-	-	kV

- [1]The minimum HBM model ESD voltage for all pins complies with the Class-3B standard of JEDEC JS-001-2017 document.
- [2] The minimum MM model ESD voltage for all pins complies with the Class-C standard in JEDEC EIA/JESD22-A115C document.

5.3 Electrical Characteristics (Unless otherwise specified, $V_{DD}=3.5V \sim 5V$, $T_a=25^{\circ}C$)



Project	Symbol	Test Circuit	Test Condition		Mini Value	Typical Value	Max Value	Unit
REXT voltage characteristics	VR_TT	1	$V_{DD}=5V, R_{EXT}=1K$ $IGAIN=100\%, T_a=25^{\circ}C$		-	1.533	-	V
	VR_LT		$V_{DD}=5V$ $R_{EXT}=1K$ $IGAIN=100\%$	$T_a=-40^{\circ}C$	-	1.56	-	V
	VR_HT			$T_a=85^{\circ}C$	-	1.495	-	V
	VR_LV		$T_a=25^{\circ}C$ $R_{EXT}=1K$ $IGAIN=100\%$	$V_{DD}=5.5V$	-	1.535	-	V
	VR_HV			$V_{DD}=2.6V$	-	1.521	-	V
Constant current output inflection point	V _{OUT1}	2	$V_{DD}=5.0V$ $R_{EXT}=1k$ 拐点等级 0	IOUT=18mA	-	350	-	mV
	V _{OUT2}			IOUT=9mA	-	290	-	mV
	V _{OUT3}			IOUT=4.5mA	-	260	-	mV
	V _{OUT4}		$V_{DD}=5.0V$ $R_{EXT}=1k$ 拐点等级 1	IOUT=18mA	-	460	-	mV
	V _{OUT5}			IOUT=9mA	-	390	-	mV
	V _{OUT6}			IOUT=4.5mA	-	360	-	mV
Constant current source output range	IOUT	2	拐点等级 0		0.5	-	18	mA
	IOUT1		拐点等级 1		0.5	-	25	mA
Inter-chip output current error	DCHIP	2	$V_{DS}=0.6V$		—	± 1.5	± 2.0	%
Output current error between channels	DCHL	2	$V_{DS}=0.6V$		—	± 1.2	± 2.5	%
Constant current error/VDS variation	%/ ΔV_{DS}	2	$V_{DS}=0.3 \sim 3.0V$		—	—	± 1.0	%/V
Constant current error /VDD variation	%/ ΔV_{DD}	2	$V_{DD}=3.5V \sim 5.0V$		—	—	± 1.0	%/V
output voltage at ON	V _{O(ON)}	2	OUT0~OUT15		0.3	-	V_{DD}	V
SDO drive current	High Level	IOH	3	$V_{DD}=5V$	—	-22	—	mA
	Low Level				—	23	—	mA
Output Level	High Level	VOH	4	IOH=-1mA	4.6	—	—	V
	Low Level			IOL=1mA	—	—	0.4	V
High level logistic	V _{IH}	5	-		$0.7 \cdot V_{DD}$	-	V_{DD}	V

16 Channel 16 scans Low-turning PWM Constant Current Driver

input voltage							
Low level logistic input voltage	V_{IL}		-	GND	-	$0.3 \cdot V_{DD}$	V
Supply current (with resistance) (White screen power consumption)	I_{DD1}	6	$R_{EXT}=3K$, White Screen $I_{OUT}=6mA$, Refresh rate 3840	-	4.69	-	mA
Supply current (with resistance) (Black screen energy-saving power consumption)	I_{DD3}	6	$R_{EXT}=3K$, Black Screen $I_{OUT}=6mA$, Capability Priority	-	2.95	-	mA
	I_{DD4}		$R_{EXT}=3K$, Black Screen $I_{OUT}=6mA$, Low power consumption priority	-	1.29	-	mA
	I_{DD5}		$R_{EXT}=3K$, Black Screen $I_{OUT}=6mA$, lowest power consumption	-	0.68	-	mA
Power supply current (no resistance) (White screen power consumption)	I_{DD1}	6	White Screen $I_{OUT}=6mA$, Refresh Rate 3840	-	4.26	-	mA
Power supply current (no resistance) (Black screen energy-saving power consumption)	I_{DD3}		Black Screen $I_{OUT}=6mA$, Capability Priority	-	2.88	-	mA
	I_{DD4}		Black Screen $I_{OUT}=6mA$, Low power consumption priority	-	1.45	-	mA
	I_{DD5}		Black Screen $I_{OUT}=6mA$, lowest power consumption	-	0.79	-	mA

5.4 Dynamic Characteristics (Unless otherwise specified, VDD=3.5V ~ 5V, Ta=25°C)


Project	Symbol	Test Circuit	Test Condition	Mini Value	Typical Value	Max Valule	Unit
CLK-SDO delay	TPHL	7	VDD=5V, FDCLK=12.5MHz	-	15	-	ns
CLK-SDO delay	TPLH			-	15	-	ns
CLK-SDO delay	TPHL1			-	25	-	ns
CLK-SDO delay	TPLH1			-	15	-	ns
Constant Current Output Rise Time	TR		IOUT=10mA, $\Delta V_{OUT}=3V$	-	65	-	ns
Constant current output drop time	TF			-	50	-	ns

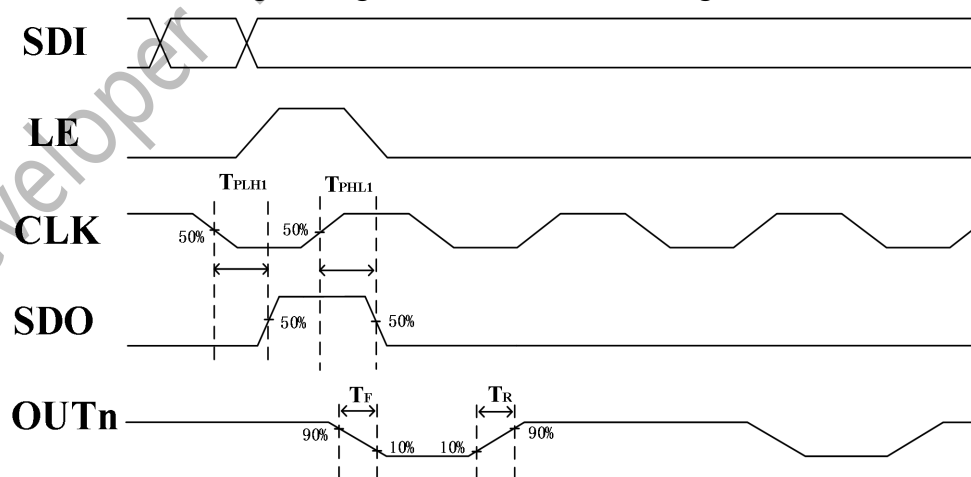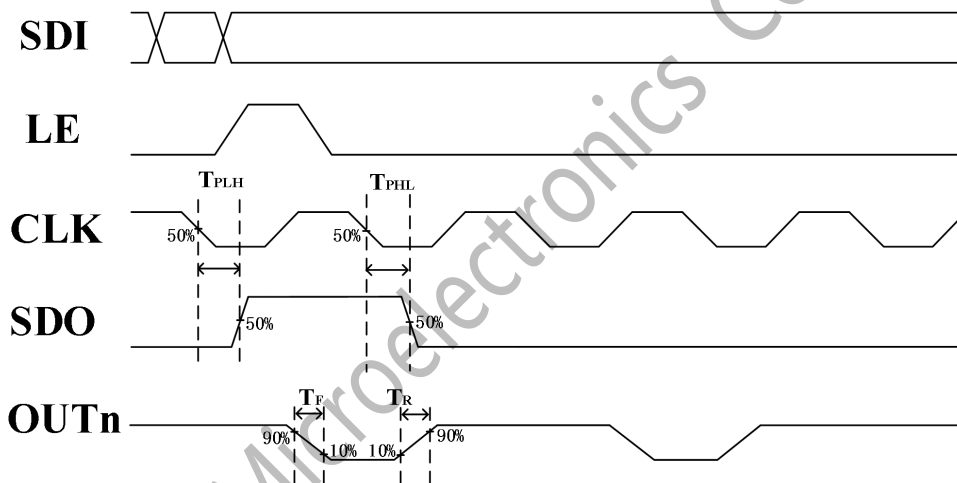

6 Test Circuit Diagram

6.1 Test Circuit 1


- External resistance voltage

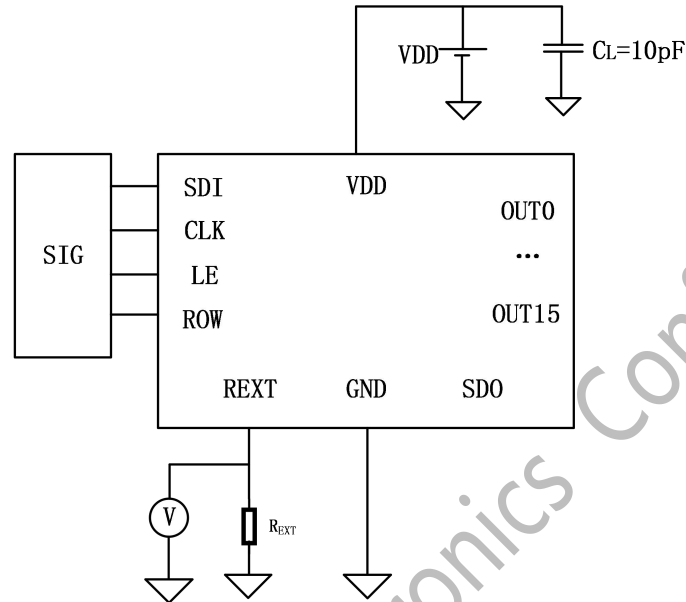

Test circuit 2 schematic diagram

6.2 Test Circuit 2

- Constant current output inflection point voltage & corresponding inflection point current (under open circuit detection)

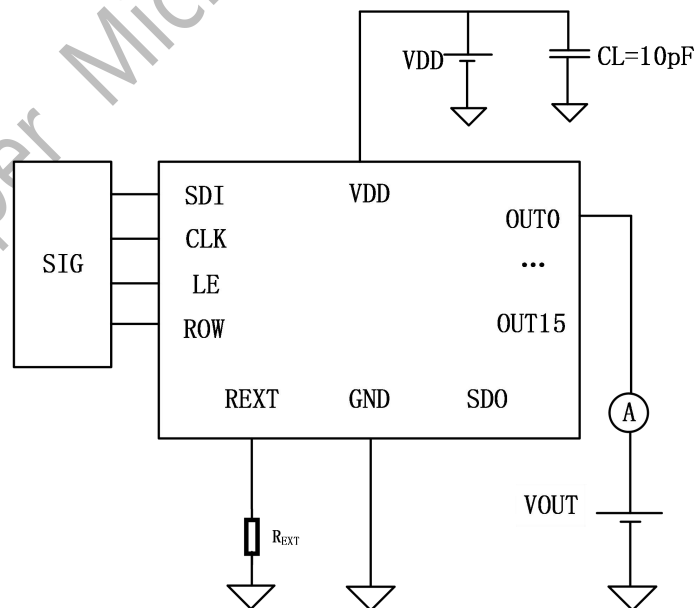


Test circuit 2 schematic diagram



6.3 Test Circuit 3


- IOH、IOL

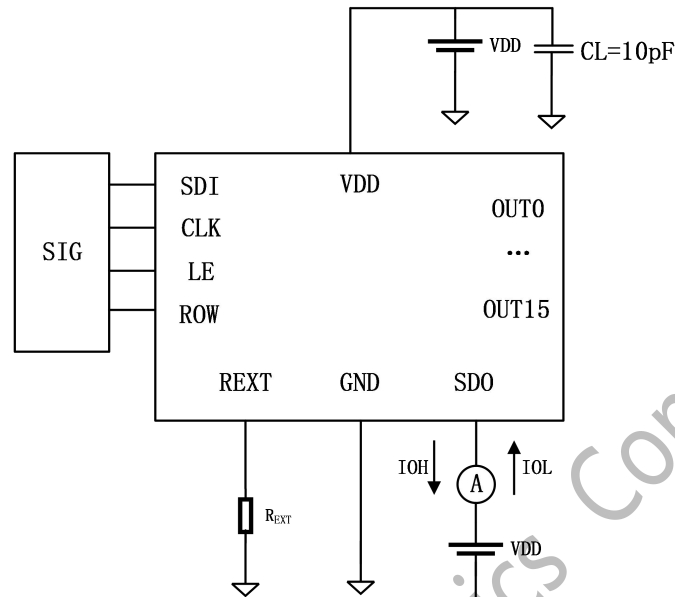

Test circuit 3 schematic diagram

6.4 Test Circuit 4

- VOH、VOL

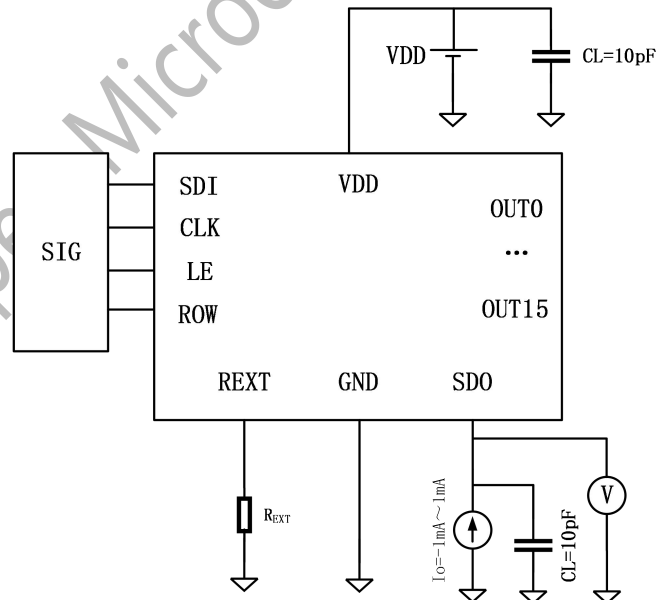


Test circuit 4 schematic diagram



6.5 Test Circuit 5


- V_{IH} , V_{IL}

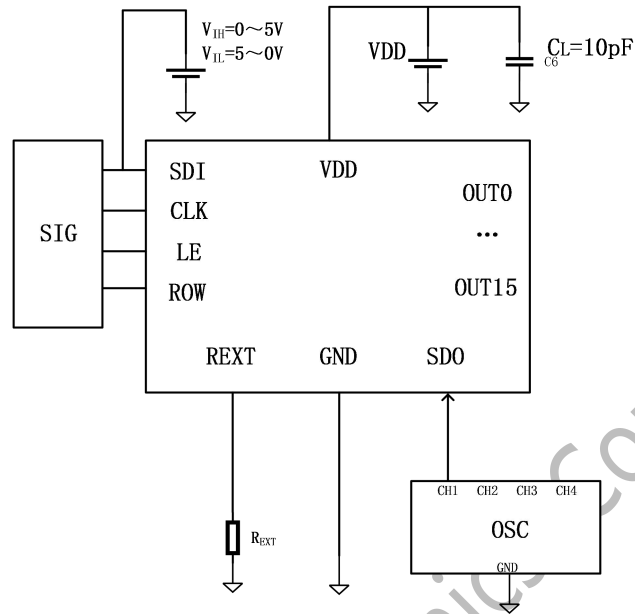

Test circuit 5 schematic diagram

6.6 Test Circuit 6


- Supply Current

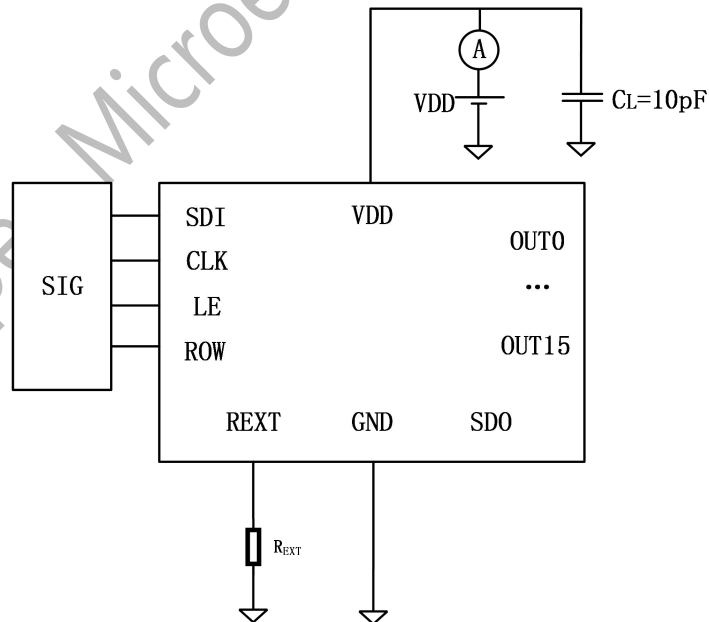

Test circuit 6 schematic diagram

6.7 Test Circuit 7

- Dynamic Characteristic

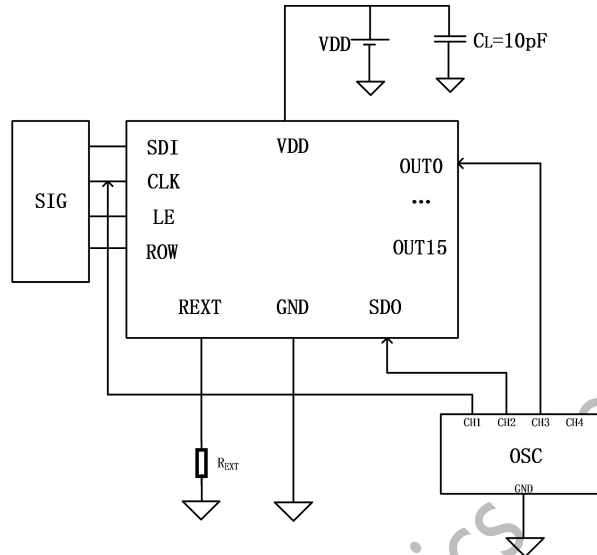


Test circuit 7 schematic diagram

7 Typical Characteristic Diagram

7.1 Constant Current Source Accuracy Test Chart

7.1.1 Inter-chip Current Error


$$\text{Inter-channel current error} = \frac{\text{Average channel current} - \text{average of all chip channels}}{\text{Average of all chip channels}}$$

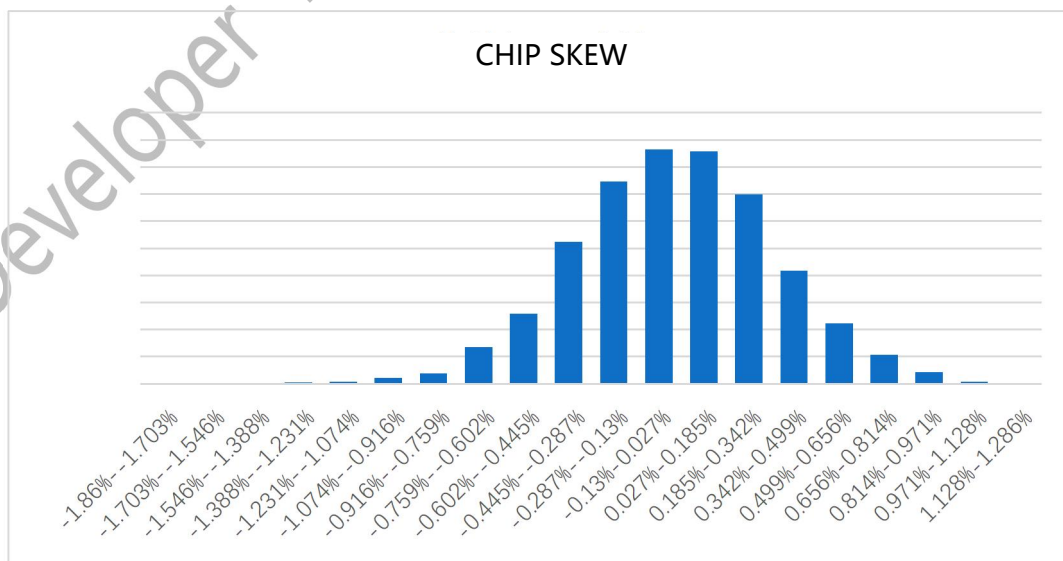



7.1.2 Inter- channel Current Error


$$\text{Current error between channels} = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}}$$

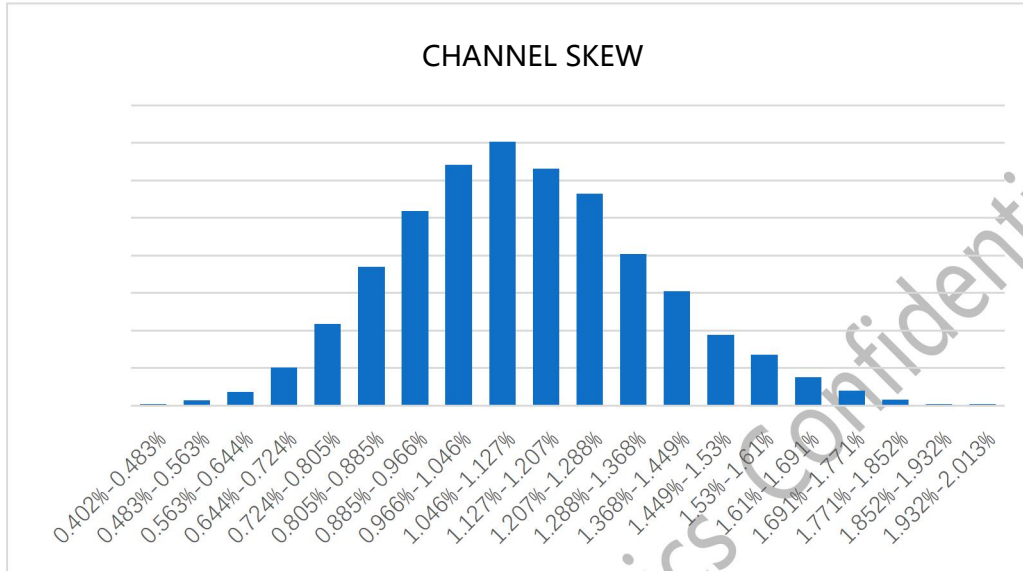


7.2 Constant Current Source Inflexion Point

When the DP3153 is applied to the design of LED displays, the current differences between channels and even between chips are minimal. This is due to the DP3153's excellent constant current output characteristics::

- The maximum on-chip channel current is less than $\pm 2.5\%$, and the maximum on-chip current error is less than $\pm 2.0\%$;
- When the load terminal voltage (V_{out}) changes, the stability of the output current is not affected, as shown in the figure below:

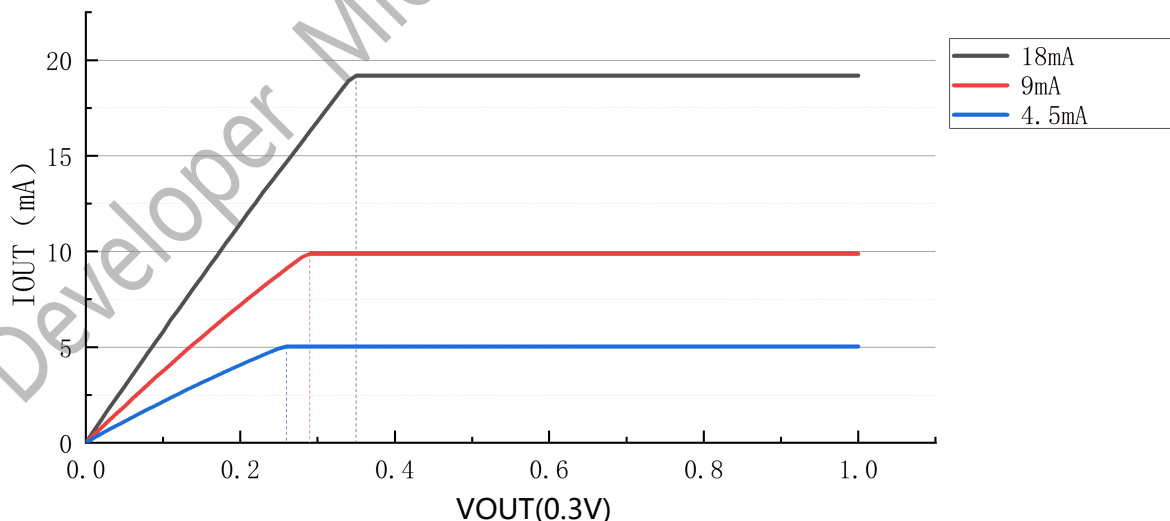

The relationship between IOUT and VOUT when VDD=2.6V-5.5V is low transition

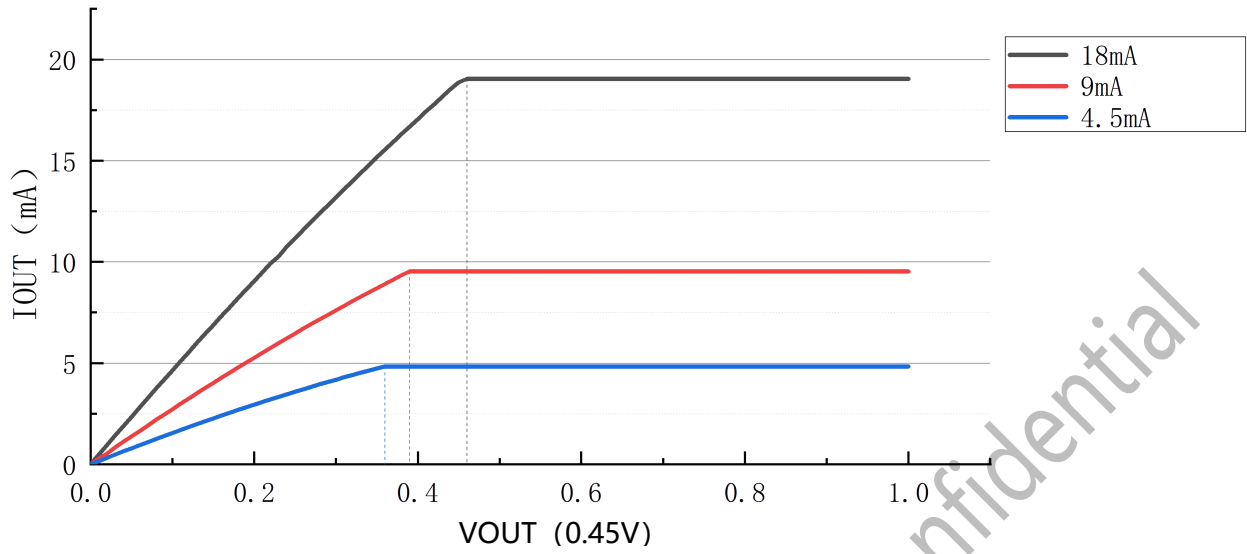

The relationship between I_{OUT} and V_{OUT} when $V_{DD}=2.6V-5.5V$ is not low transition




7.3 Adjust Output Current by An External Resistor

Output current value is calculated by the following formula:

$$I_{OUT} = \frac{IGAIN \times 18}{R_{ext}}, 20\% \leq IGAIN \leq 200\%$$

The REXT in the formula is the resistance to the ground of the chip's 23PIN REXT port. For example, when the current gain IGAIN=100%, REXT=1kΩ, the output current value can be obtained by calculating the formula

18mA.

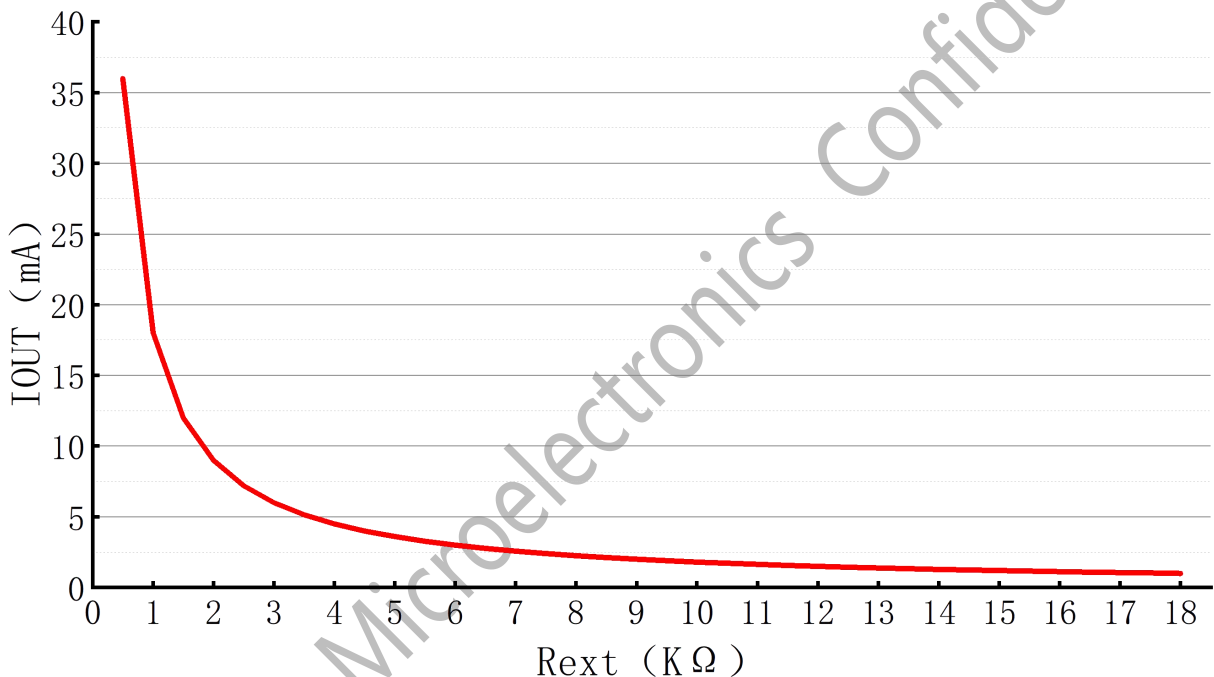

IGAIN=100%, the relationship between REXT and Iout

7.4 Resistive-free Model with Current Adjusted by register

Output current value is calculated by the following formula:

$$I_{out} = [70\mu A + 0.4\mu A * (reg0x0f<6:0> - 16)] * reg0x08<7:0> * (1 + 0.5 * reg0x0b<5>)$$

8 Typical Display Effect Sample Image


- The specific display effect will be affected by the conditions of the lamp board and register parameters. The following test results are for reference only.

8.1 Display Effect


8.1.1 Remove Open Circuit Bad Spot Crosses

The following is a comparison of the display effect before and after removing the open circuit bad spot cross, you can see:

- Chip can remove the bad cross well after removing the open bad cross function, optimize the display effect.

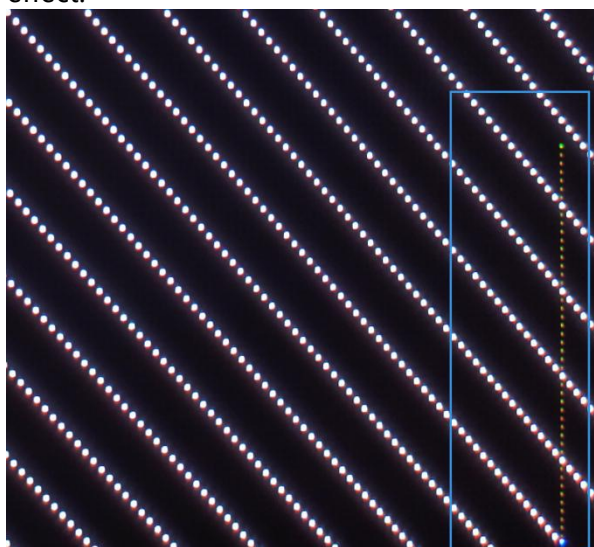

Display Effect before Removing open circuit bad spots cross

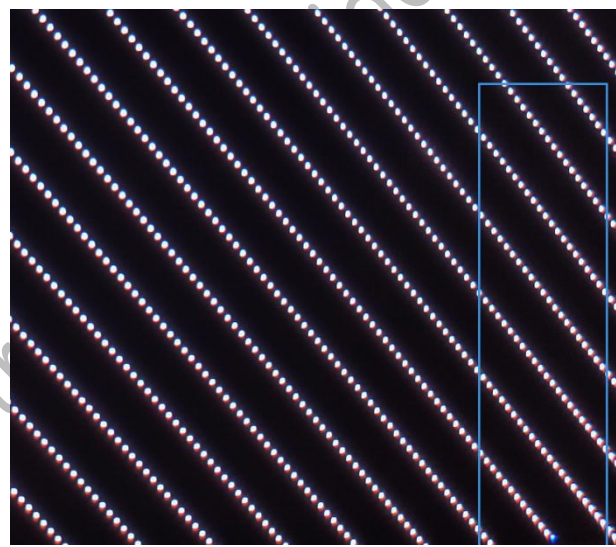

Display effect after removing the open circuit bad spot cross


8.1.2 High and Low Gray Interference and Coupling Display Bad effect Optimization

The following figure is the optimization effect of high-low gray interference and coupling display poor effects can be seen:

- The low gray coupling of the block and the low gray coupling of the white block are not sensed.
- Chip show good display effect.



黑块低灰耦合测试显示效果

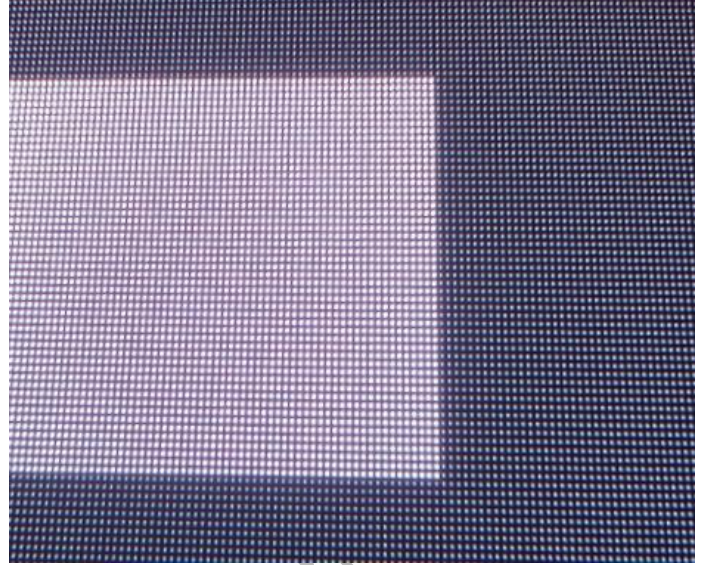


白块低灰耦合测试显示效果

8.1.3 Remove Ghostiness and Bandless Lighting Effects

Below is the removal of ghosting and bandless lighting effect that can be seen:


- Oblique scanning ghost, text ghost and other problems cannot be observed.
- Highlight block with bright, oblique scan superimposed highlight block with bright test results are very good.
- Chip shows good display effect.

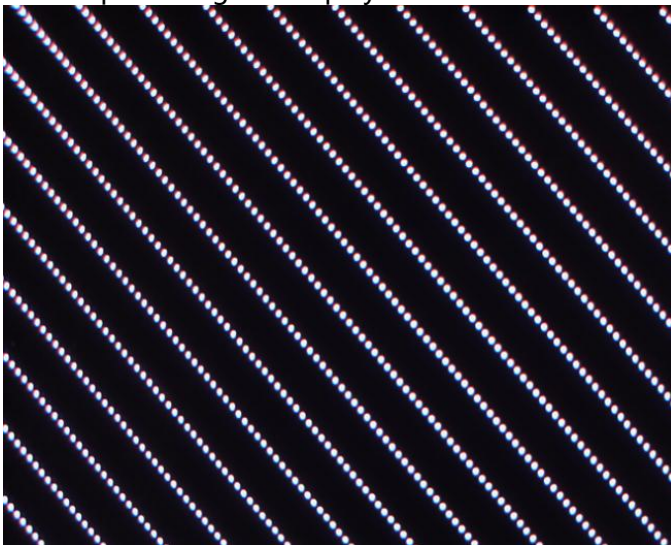


Slanted scan ghosting test display effect



Text ghosting test display effect

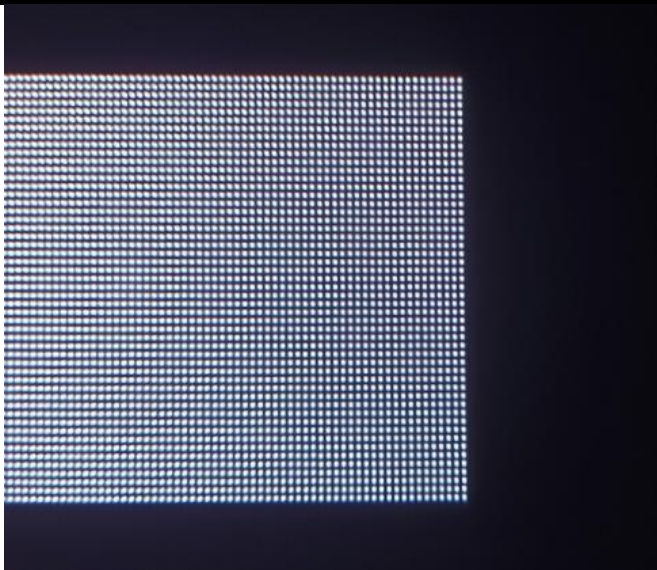

Highlight block with light test display effect

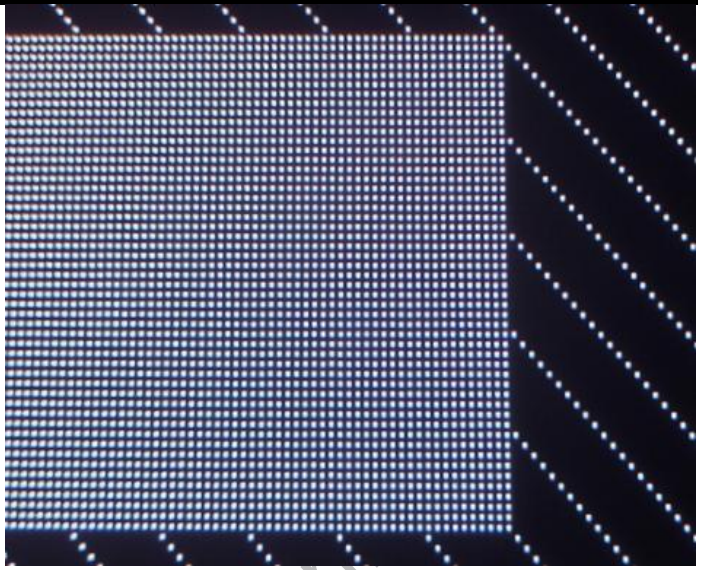

Oblique scan superimposed highlight block with light test display effect

9 Instruction and Register

9.1 Register Instruction

Instruction Name	LE	Description
DATA_LATCH	1	Latch 16bit data to SRAM
DDR	2	Enter Double-edge Mode
VSYNC	3	Update Display Data
WR_CFG	5	Write Register
PRE_ACT	14	Write Enable
SDR	15	Enter Single-edge Mode

9.2 Data Instructions

Data sending Sequence	Line	Channel
1	Line 0	Channel 15 (OUT15)
2		Channel 14 (OUT14)
.....	
16		Channel 0 (OUT0)
17	Line 1	Channel 15 (OUT15)
18		Channel 14 (OUT14)




.....	
32		Channel 0 (OUT0)
.....		
497	Line 15	Channel 15 (OUT15)
498		Channel 14 (OUT14)
.....	
512		Channel 0 (OUT0)

9.3 Single/Double Mode Switch


1. Sample SDI data with CLK rising edge in single edge mode, and sample SDI data with CLK rising edge and falling edge in double edge mode.
2. CLK rising edge counting is used for fixed OE signal width
3. The command for single-mode and dual-mode along mode switchover needs to be sent once after it is powered on

To enter the single-edge mode after power-on, send the command shown in the following figure:

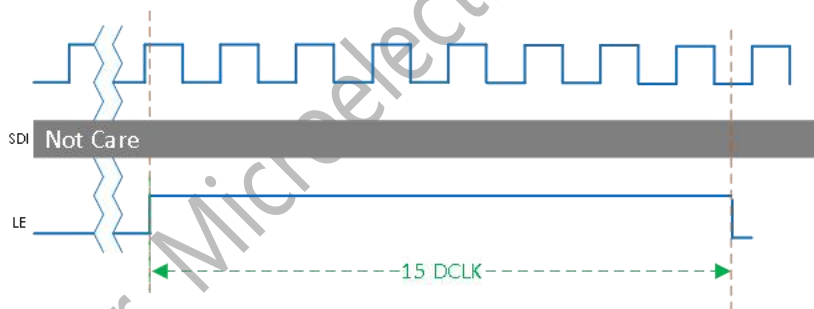

15 DCLK edges (up + down) are set to SDR

To enter the dual-edge mode after power-on, send the command shown in the following figure

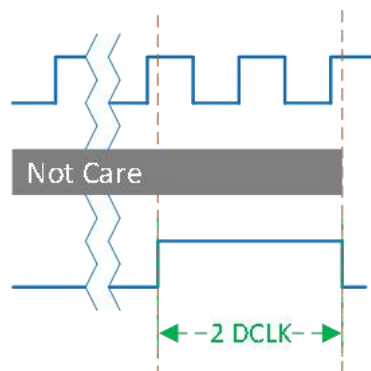


The two DCLK rising edges are set to DDR

16 Channel 16 scans Low-turning PWM Constant Current Driver


If the customer needs to adjust the single and double edges during debugging

If already in dual edge mode and need to enter single edge mode, send the following command

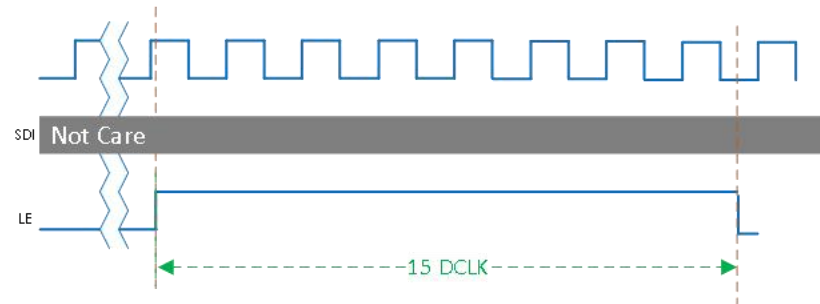

In double edge mode, 15 DCLK edges (up + down) are set to SDR

If already in single edge mode, you need to enter double edge mode

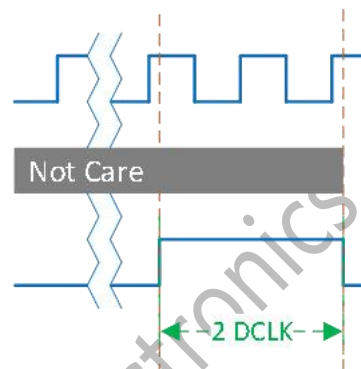

In single-edge mode, the two DCLK rising edges are set to DDR

9.4 Write Register

Send PRE_ACT first, then run WR_CFG, LE is 5 DCLK width, the first input 8bit is the register address bit, the last input 8bit is the data bit of the corresponding register address.

For example:


{A7, A6, A5, A4, A3, A2, A1, A0} = 8' b0000_0111;

{D7, D6, D5, D4, D3, D2, D1, D0}=8' b1001_1101;

That is, register 0x07 (8'b0000_0111) is set to 8'b1001_1101.

9.5 Register Singal Sending Way

The specific driving methods are as follows:

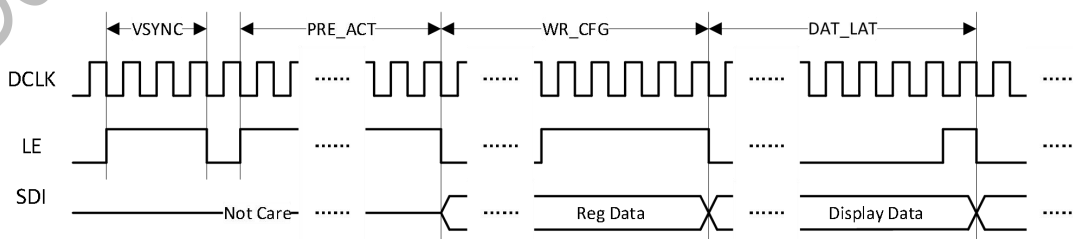

As shown in the figure above, the order of sending instructions and data in each frame:


1. Send VSYNC.

2. Send PRE_ACT.
3. Send WR_CFG and write the register configuration. Each frame can only write a register value of one address, and 15 frames complete the refresh of all registers (a total of 15 valid register addresses) to save configuration time.
4. Send DAT_LAT several times to write display data together with SDI.
5. The data sending bit is displayed as 16 bits.

9.6 ROW Signal Sending Way

The DP3153 integrated on-chip GCLK generation circuit changes the OE signal of the universal constant current chip to the ROW signal, using ROW the rising edge of the ROW represents the beginning of a row display, where the high level width of the row has two types, namely:

- 1.W12: The high-level width of the ROW is 12 DCLK width
- 2.W4: The high-level width of the ROW is 4 DCLK width

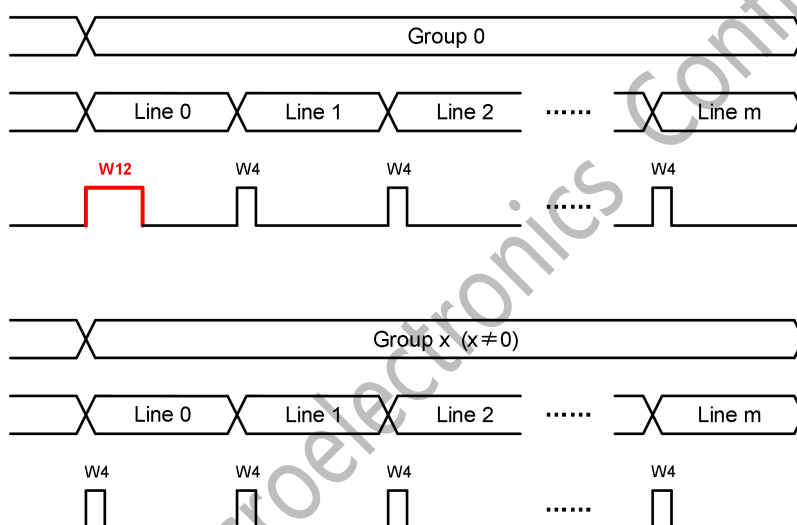

As shown in the figure above, when ROW signals are sent, only the first ROW of Group 1 (Line 0) needs to send ROW signals of W12, and other ROW signals are sent according to W4.

9.7 PWM Display Mode

DP3153 integrated four PWM display modes:

1. General frame synchronization mode; 2. High-gray data independent refresh synchronous mode;
3. High-gray data independently refreshes asynchronous mode; 4. Low Ash High Brush mode

1. Universal frame synchronization mode



The number of display is automatically configured by the control card;

Number of groups (rounded)-frame period/display time of a group;

Display time of group=(display time of a row)*(Numbers of raw scan);

One line display time = $((2 * \text{reg0x05}[7:4] + 1 + 2 * \text{reg0x05}[3:0] + 1 + 4 * \text{reg0x}[6:0] + 1)) / (\text{reg0x06}[2:0] + 1) + \text{break time}$, the answer is the Numbers of DCLK to be need;

No Display ,wait VSYCN signal

2. High gray independent refresh synchronization mode



The number of display is automatically configured by the control card;

Number of groups (rounded)-frame period/display time of a group;

Display time of group=(display time of a row)*(Numbers of raw scan);

One line display time = $((2 * \text{reg0x05}[7:4] + 1 + 2 * \text{reg0x05}[3:0] + 1 + 4 * \text{reg0x}[6:0] + 1)) / (\text{reg0x06}[2:0] + 1) + \text{break time}$, the answer is the Numbers of DCLK to be need;

3. High gray independent refresh asynchronous mode



The numbers of display group is manual configured (default value 64);

Display time of group=(display time of a row)*(Numbers of raw scan);

One line display time = $((2 * \text{reg0x05}[7:4] + 1 + 2 * \text{reg0x05}[3:0] + 1 + 4 * \text{reg0x}[6:0] + 1)) / (\text{reg0x06}[2:0] + 1) + \text{break time}$, the answer is the Numbers of DCLK to be need;

4. Low Gray High brush mode



No Display ,wait VSYCN signal

One line display time = $((2 * \text{reg0x05}[7:4] + 1 + 2 * \text{reg0x05}[3:0] + 1 + 4 * \text{reg0x}[6:0] + 1)) / (\text{reg0x06}[2:0] + 1) + \text{break time}$, the answer is the Numbers of DCLK to be need;

The numbers of display group is manual configured (default value 64);

High brush rate (int)=frame period/ (times of display all group), between every two VSYNC Signal, the Numbers of Row signal need to be send =High brush rate *Numbers of group*Numbers of Row Signal, In the diagram example,the brush rate is 2.

9.7.1 General Frame Synchronization Mode

Working mode and related configurations as follow:

1. Configure REG0X0C [7:6] = 0 and set the PWM display mode to Universal Frame Sync Mode
2. The number of DCLK per line is calculated using the Formula
3. The configuration shows the number of data sets, REG0X03[6:0] = refresh rate/frame rate -1(if refresh rate is not equal to 3840 or 7680, use Depp's gamma DLL)
4. After VSYNC, the first Line (Line 0) of Group 1(Group 0)
5. Stop displaying data from the current frame until the next VSYNC comes

9.7.2 High Gray Data Refresh Frame Synchronization Model Independently

Working mode and related configurations as follow:

11. Configure REG0X0C [7:6] = 2, set PWM display mode to high gray data independent refresh frame synchronization mode under this mode display refresh rate support 3840HZ ~ 7680HZ, configure display data group register reg0x03[6:0] = 127
2. Calculate a set of display times = frame period/(refresh rate/frame rate)
3. Calculate the display time of a row = a set of display times/number of rows
4. The DCLK number of each row is calculated according to the formula, and the formula is satisfied by adjusting the row gray level series, the DCLK frequency and the register reg0x6[1:0] .
5. Row is sent continuously at a fixed display frequency. The frequency of the ROW is independent of VSYNC the frequency of the ROW signal = 1/1 ROW display time = 1/2 time between the rising edges of the ROW
6. Row 0 of group 0 sends the ROW signal of W12, other cases send the ROW signal of W4 every (group number * ROW scan number-RRB- ROW signal, only W12 W12, and in this way has been circulating.
7. If the refresh rate is not equal to 3840 or 7680, you need to use Depp's gamma dll.

9.7.3 High-gray data Independently Refreshes Asynchronous Mode

Working mode and related configurations as follow:

1. Configure REG0X0C [7:6] = 3, set the PWM display mode to high gray data independent refresh asynchronous mode
2. The number of DCLKS per line is calculated using the Formula
Displays the number of data groups manually configured, the default is 64 groups (reg0x03[6:0] = 7' H3F).
3. ROW continuously transmission at a fixed display frequency without interruption, and ROW frequency is independent of VSYNC.

Row signal frequency = 1/1 ROW display time = 1/2 ROW rise edge time

4. Row 0 of group 0 sends the ROW signal of W12, other cases send the ROW signal of W4 per (group number (as per register configuration value) * ROW scan number-RRB- ROW signal, only W12, and in this way has been circulating. There is no limit to the number of cycles allowed in a frame.
5. Visual refresh rate = 1/(one line display time * scans)

9.7.4 Low Gray High Brush Mode

Working mode and related configurations as follow:

1. Configure REG0X0C [7:6] = 1, set PWM display mode to Low Ash High Brush Mode
2. Display the number of groups manually (the default is 64) . If the refresh rate is not equal to 3840 or 7680, use Depp's gamma DLL
3. The DCLK number of each row is calculated according to the formula, and the display time of a row is calculated
4. Calculate a set of display times = one line of display times * number of lines
5. Calculate all group display times = one group display times * number of groups
6. High brush rate (rounded) = frame period/display time for all groups
7. Before both VSYNC need to send a high brush rate * display array number * scan several ROW signals
8. After VSYNC, Line 1(Line 0) of Group 1(Group 0)
9. The data for the current frame is displayed at a high brush rate and then stopped until the next VSYNC arrival.
10. Visual refresh rate = frame rate * data set * high refresh rate = (3840/7680 Hz) * high refresh rate
11. The low-gray high-brush mode only needs to change the ROW signal according to the above steps, the gray level does not need to be adjusted.

9.8 Relevant Configuration of PWM Display

9.8.1 Number of Row Scans Configured

DP3153 supports up to 16 line scans, configured as REG0X02[4:0] = number of line scans -1

9.8.2

Reg0x04[6:0] represents a row of PWM display length, one row of PWM display length = $4 * (\text{reg0x04}[6:0] + 1)$, maximum support $128 \times 4 = 512$ if the configuration row gray level is 128, then set $\text{reg0x04}[6:0] = 7'$ H1F = 31


9.8.3 PWM Display Packet Configuration

Reg0x03[6:0] represents the number of PWM groups, PWM shows the number of groups = $\text{Reg0x03}[6:0] + 1$, the maximum number of support groups is 128 groups

In frame synchronous mode, PWM display group number = refresh rate/frame rate, configure $\text{reg0x03}[6:0] = \text{refresh rate/frame rate} - 1$

In asynchronous mode, the PWM display packet can be configured independently (independent of the refresh rate)

9.8.4 Internal Grayscale Clock Configuration

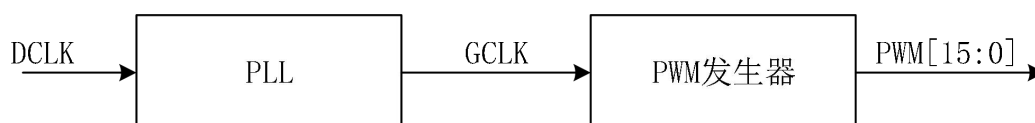

DP3153 integrates PLL on chip to produce gray clock GCLK.

The relevant calculation formula is as follows:

$$FGCLK = FDCLK * (\text{reg0x06}[1:0] + 1)$$

9.8.5 PWM Grayscale Series & Gamma Generation

PWM gray-scale series (maximum) = * PWM gray-scale series show grouping = $4 * (\text{reg0x04}[\text{lost}] + 1) * (\text{reg0x03}[\text{lost}] + 1) - 1$

$\text{reg0x04}[6:0] = 7' \text{ h7f}$, $\text{reg0x03}[6:0] = 7' \text{ h7f}$

PWM gray level (maximum) = $4 * (127 + 1) * (127 + 1) - 1 = 65535 = 16\text{bit}$

Gamma can be calculated and generated according to the PWM gray level (maximum) (this part is generated by the control card manufacturer according to their own gamma generation formula)


The maximum chip gray level only supports 16bit (low 16 bits are valid).

9.8.6 Calculated the Display Time for Each Row

The display time of each line is expressed by the number of DCLK, and the calculation formula is as follow:

$$(2 * (\text{reg0x05}[7:4] + 1) + 2 * (\text{reg0x05}[3:0] + 1) + 4 * (\text{reg0x04}[6:0] + 1)) / (\text{reg0x06}[2:0] + 1) + \text{break time}$$

Note: the above results are rounded.

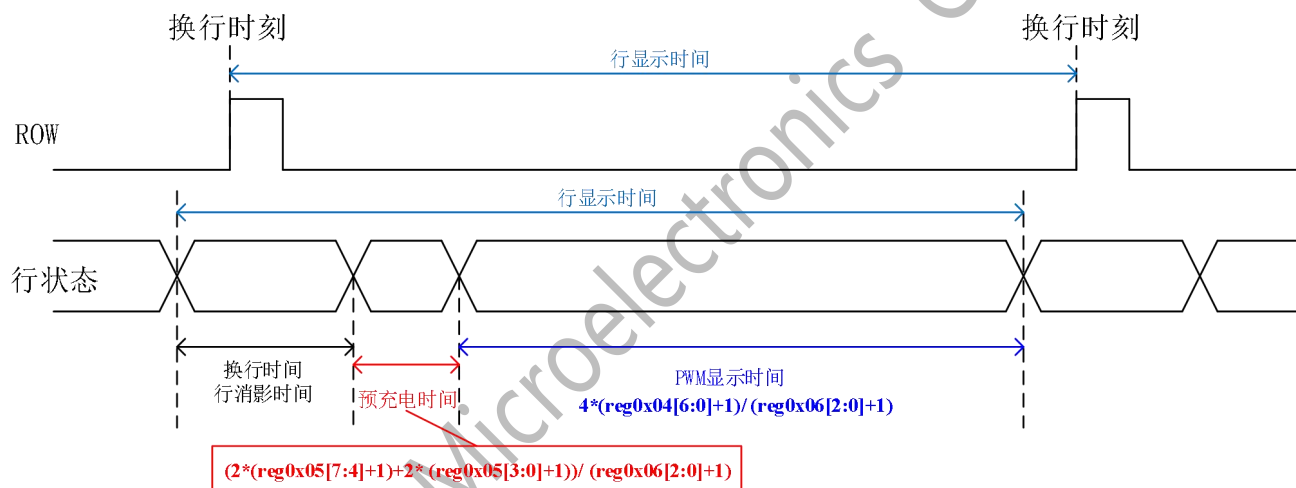

9.9 Open Circuit Detection and Removal of Bad Spots

Selected **【Remove bad spots】** : $\text{reg0x0c}[1] = 1$;

Non-selected **【Remove bad spots】** : $\text{reg0x0c}[1] = 0$



Open circuit detection timing:

1. The open circuit test is performed 3 seconds after power-on or after clicking open circuit test.
2. Configure $\text{reg0x02}[7] = 1$, $\text{reg0x03}[7] = 0$ (Enable Open detection mode)
 Configure $\text{reg0x0b}[7:5] = 0$ (Set constant current inflection point to the lowest)
 Configure $\text{reg0x08}[7:0]$ move two digits to the right and fill the high position with 0, (configure output current to 25% of normal)
3. Line signal switch to line 0 and stop all line signals for one frame time (60ms)
4. Change the line signal, quickly scan from line 0 to the last line, and then back to line 0 (this step is mainly to avoid the closure of the output channel that exists in some line driver chips).



16 Channel 16 scans Low-turning PWM Constant Current Driver

5. Configure `reg0x0c[0]=1` (Open detection mode is enabled)
6. Sending a Row signal, set the Row to high first and then to low. The high level time (400us recommended) is the time required for detecting a ROW, and the low level time (≥ 16 DCLK recommended) is the data collection and latch time.
7. Line feed, as many lines as need to be scanned, step 6 perform as many times. Line breaks are recommended to align with the rising edge of the ROW.
8. After the detection is complete, configure `reg0x0c[0]=0` (Turn off open detection mode), `reg0x0c[1]=1` (selected **Remove bad spots**).
9. During open-circuit detection, `LE=0`, DCLK is normally transmitted continuously (at least 128 DCLK between two rows are guaranteed).

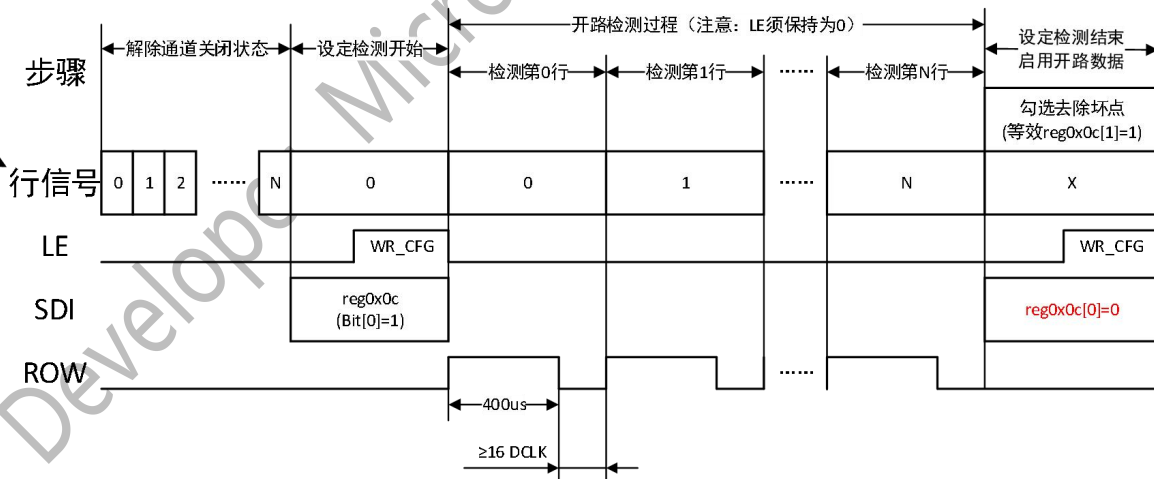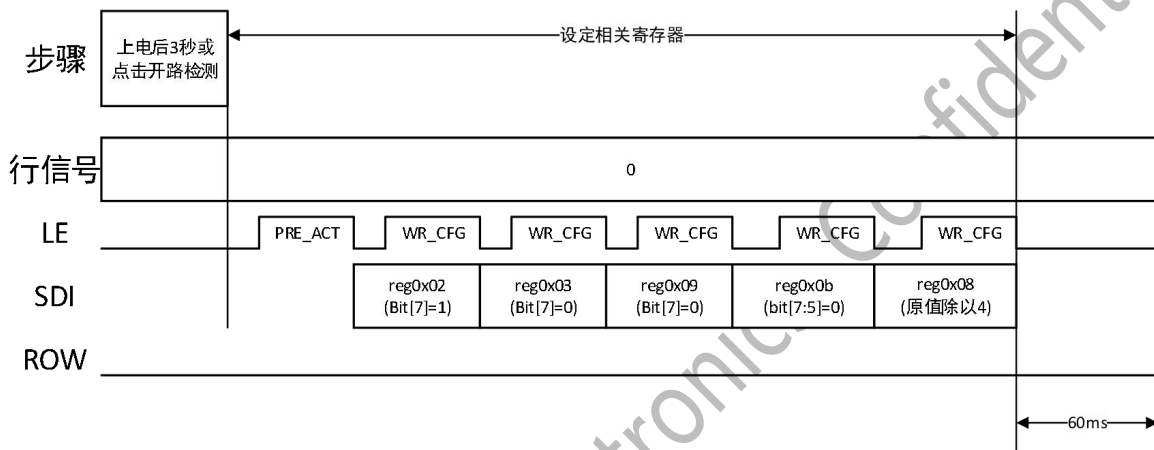

9.10 Register

Register	Register Function Name	Register function description & default value
0x02		R: 2A G: 2A B: 2A
7	OPDET_EN_A1	OPDET_EN_A1 High effective; It must work with OPDET_EN_A2 and OPDET_EN_A3
6		Reserved
5:0	LINE_SET<5:0>	Scanning Lines= LINE_SET +1
0x03		R: 3F G: 3F B: 3F
7	OPDET_EN_A2	OPDET_EN_A2 is low valid. It must work with OPDET_EN_A1 and OPDET_EN_A3
6:0	GROUP_SET<6:0>	Display refresh ratio =REG03<6:0> +1
0x04		R: 20 G: 20 B: 20
7		Reserved
6:0	PWM_WIDTH<6:0>	Row GCLK number
0x05		R: 34 G: 34 B: 34
7:3	DISSHD_TIME_1<3:0>	Shadow elimination Time -0 to 15, total16 levels, the default value is 0
2:0	DISSHD_TIME_2<3:0>	Shadow elimination time -0 ~15, total 16 levels
0x06		R: 42 G: 42 B: 42
7:3	DECOUP_RAT<4:0>	Coupling optimization coefficient
2:0	PLL_DIV<2:0>	GCLK frequency doubling 0: 1 frequency doubling 1: 2 frequency doubling 2: 3 frequency doubling 3: 4 frequency doubling
0x07		R: 00 G: 00 B: 00
7	Gamma_COARSE_EN	Gamma Coarse switch -1: coarse switch enabled 0: coarse switch off
6:4	Gamma_COARSE<2:0>	Gamma 粗调等级-0~7 级, 共 8 级
3	Gamma_FINE_EN	Gamma fine-tune switch -1: fine-tune enabled 0: fine-tune disabled
2:0	Gamma_FINE<2:0>	Gamma Fine level -0 to 7, 8 in total
0x08		R: 7F G: 7F B: 7F
7:0	IGAIN<7:0>	reg08[7:6] is a progression of 50% of the current gain reg08[5:0]= round (128*IGAIN/(reg08[7:6]+1))-1
0x09		R: 60 G: 60 B: 60
7	EN_IR	0: resistance 1: non-resistance
6:5		Reserved
4:0	DECOUP_1<4:0>	Coupling optimization level 1-0 ~31, total 32 levels
0x0a		R: BE G: BE B: BE
7:6	DECOUP_ENHANCE<1:0>	Coupling optimization enhancement level - decreases from 0 to 3
5		Reserved

16 Channel 16 scans Low-turning PWM Constant Current Driver

4	DISSHD_EN	Extinction level switch - On :1 Off: 0
3	DECOUP_EN	Coupling optimization switch
2:1	PIT_OPT<1:0>	Low grey pitting optimization -0 ~3, total 4 levels, the default is level 3
0	LG_ENHANCE	Low gray display effect enhancement switch
0x0b		R: 28 G: 30 B: 31
7:5	CORNER <2:0>	Constant current output inflection point level 0: low inflection point (0.18 V - 0.3 V) corresponds to the current range of 0.5mA~18mA 1: Non- low inflection point (0.3 V - 0.45 V) corresponds to the current range of 0.5mA~25mA
4:0	DISSHD_LEVEL<4:0>	Shadow Elimination level, 0~31 level, total 32 levels
0x0c		R: 90 G: 90 B: 90
7:6	SYNC_MODE<1:0>	0: frame synchronization mode 1: Low gray high brush model 2: High gray data independently refreshed in synchronization model 3: High gray data independently refreshed in asynchronous mode
5:4	LP_MODE<1:0>	Energy-saving model 0: Dynamic energy saving 1: Dynamic Energy saving + Black screen energy saving mode 1- Performance is preferred 2: Dynamic Energy Saving + Black screen Energy Saving mode 2- Low power consumption is preferred 3: Dynamic Energy Saving + Black Screen Energy Saving Mode 3- Extremely low power consumption
3:2		Reserved
1	RM_OP	Remove the bad spot function switch
0	OPDET_EN	If both OPDET_EN_A1 and OPDET_EN_A2 are met, OPDET_EN is enabled to enter the open detection mode
0x0d		R: 08 G: 12 B: 18
7:5		Reserved
4:0	DECOUP_LEVEL<4:0>	Coupling optimization level, 0 ~31, total 32 levels
0x0e		R: 00 G: 00 B: 00
7:6		Reserved
5	PRECHA_EN	Enable coupling Optimization 2
4:0	VS_PRECHA	Coupling optimization level 2-0 ~31, total 32 levels
0x0f		R: 00 G: 00 B: 00
7		Reserved
6:0	IGAINL	'Resistance-free current regulation range +/-7.5%, step length 0.5%
0x10		R: 00 G: 00 B: 00
7:0		Reserved
0x11		R: 00 G: 00 B: 00



16 Channel 16 scans Low-turning PWM Constant Current Driver

7	OPEN_EN_B	Enable coupling optimization 1
6:0		Reserved
0x12		R: 00 G: 00 B: 00
7:0		Reserved
0x13		R: 00 G: 00 B: 00
7:0		Reserved
0x14		R: 00 G: 00 B: 00
7:0		Reserved
0x15		R: 00 G: 00 B: 00
7:0		Reserved
0x16		R: 00 G: 00 B: 00
7:0		Reserved
0x17		R: 00 G: 00 B: 00
7:0		Reserved

10 Encapsulation Cooling Power (P_D)

The maximum heat dissipation power of the encapsulation is determined by the formula: $P_{D(max)} = \frac{(T_j - T_a)}{R_{th(j-a)}}$

When all 16 channels are open, the actual power is:


$$P_{D(act)} = I_{DD} * V_{DD} + I_{OUT} * Duty * V_{DS} * 16$$

To ensure that $P_{D(act)} \leq P_{D(max)}$ output maximum current and duty cycle relationship is:

$$I_{OUT(max)} = \frac{\frac{T_j - T_a}{R_{th(j-a)}} - (I_{DD} * V_{DD})}{V_{DS} * Duty * 16}$$

Therein T_j is the junction temperature ($T_j = 150^\circ\text{C}$), T_a is the ambient temperature, V_{DS} is the constant current output port voltage, Duty is the duty cycle, and $R_{th(j-a)}$ is the thermal resistance of the encapsulation.



封装	$R_{th(j-a)} (^\circ\text{C/W})$	$P_{D(max)} (\text{W})$
QSOP24	62	2.01
QFN24	41.8	2.99

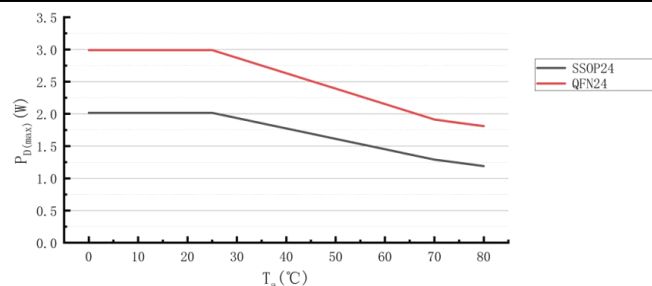



11 Load Terminal Voltage(VLED)


In order to optimize the heat dissipation capacity of the package, it is recommended that the best operating range of the output terminal voltage (VDS) is 0.3V to 1.0V(IOUT= 0.5-36mA). If $V_{DS}=V_{LED}-V_F$ and $V_{LED}=5V$, the high output voltage (VDS) may cause $PD(act) > PD(max)$; In this case, it is recommended to use the lowest possible VLED voltage for use, and an external resistor or voltage regulator can also be used as a VDROD. This results in $V_{DS}=(V_{LED}-V_F)-VDROD$, which reduces the input voltage (VDS) value. The application diagram of the external series resistor or voltage regulator can be referred to the following figure.

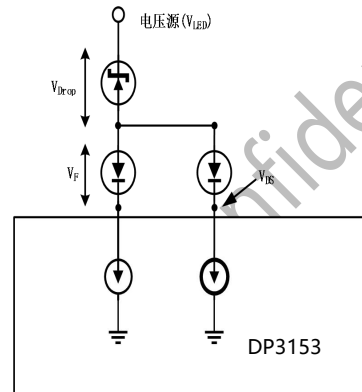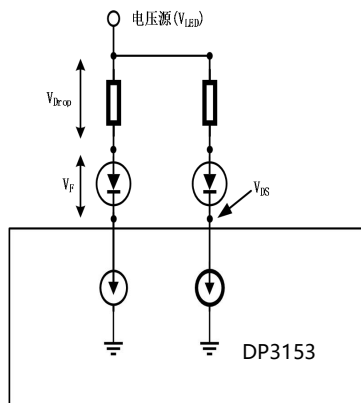



12 Encapsulation Information


- QSOP24 Plastic Encapsulation Specification Drawing

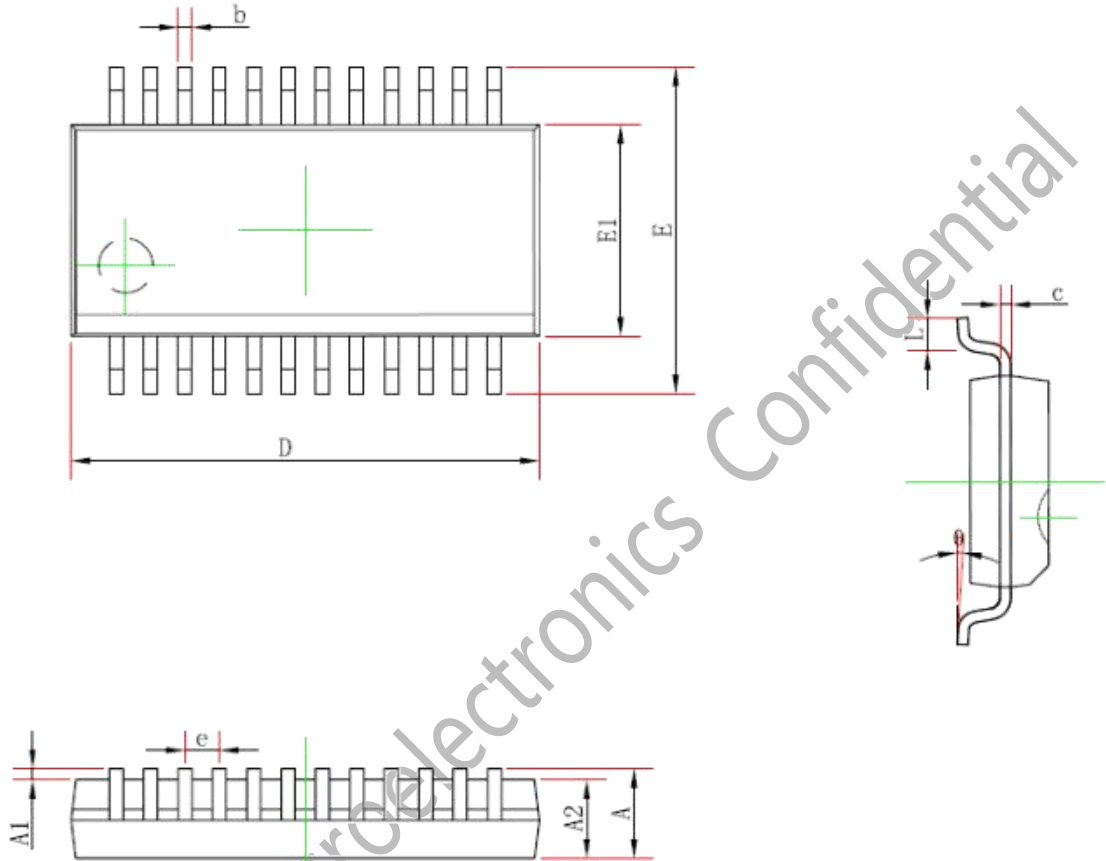


	Millimeters (mm)	
	Min	Max
A	—	1.95
A1	0.05	0.35
A2	1.05	—
b	0.1	0.4
c	0.05	0.254
D	8.2	9.2
E1	3.6	4.2
E	5.6	6.5
e	0.635TYP	
L	0.3	1.5
θ	0°	10°




● QFN24 Plastic Encapsulation Specification Drawing

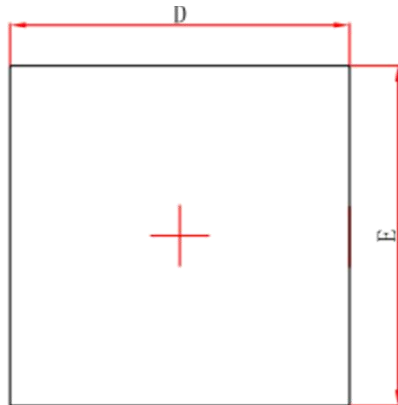

Top View

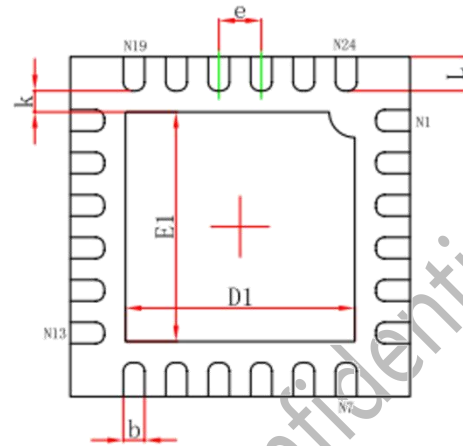

Bottom View

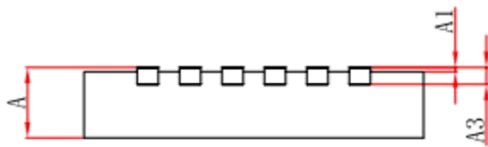

Side View

	Millimeters (mm)	
	Min	Max
A	0.700/0.800	0.800/0.900
A1	0.000	0.050
A3	0.203REF	
D	3.924	4.076
E	3.924	4.076
D1	2.6	2.8
E1	2.6	2.8
k	0.20MIN	
b	0.200	0.300
e	0.500TYP	
L	0.324	0.476



13 Official Announcement

Division I will ensure the accuracy and reliability of the product specification document, but we reserve the right to independently modify the content of the specification document without prior notice to the customer. Before placing an order, customers should contact us to obtain the latest relevant information and verify that this information is complete and up-to-date. All product sales are subject to the sales terms and conditions provided by our company at the time of order confirmation.

Division I will periodically update the content of this document. Actual product parameters may vary due to differences in models or other factors. This document does not serve as any express or implied guarantee or authorization.

The product specification does not include any authorization for the intellectual property owned by our company or any third party. With respect to the information contained in this product specification, we make no explicit or implied warranties, including but not limited to the accuracy of the specification, its fitness for commercial use, suitability for specific purposes, or non-infringement of our company's or any third party's intellectual property. We also do not assume any responsibility for any incidental or consequential losses related to this specification document and its use.

We do not assume any obligations regarding application assistance or customer product design. Customers are responsible for their own use of our company's products and applications. In order to minimize risks associated with customer products and applications, customers should provide thorough design and operational safety validation.

The reproduction, transmission or use of this document or its contents is not permitted without express written authority. Once discovered, the company will pursue its legal responsibility according to law and compensate for all losses caused to the company.

Please note that the product is used within the conditions described in this document, paying particular attention to the absolute maximum rating, operating voltage range, and electrical characteristics. The Company shall not be liable for any damage caused by malfunctions, accidents, etc. caused by the use of the product outside the conditions stated in this document.

Division I has been committed to improving the quality and reliability of products, but all semiconductor products have a certain probability of failure, which may lead to some personal accidents, fire accidents, etc. When designing products, pay full attention to redundancy design and adopt safety indicators, so as to avoid accidents.

When using our chips to produce products, Division I shall not be liable for any patent dispute arising from the use of the chip in the product, the specification of the product, or the country of import, etc., in the event of a patent dispute over the products including the chip.